



3 HORIZONTAL SECTION

NOTE:
HUNTER ACCESS TECHNOLOGIES INC. RESERVES THE RIGHT TO CHANGE & IMPROVE ITS PRODUCTS & SPECIFICATIONS WITHOUT NOTICE.

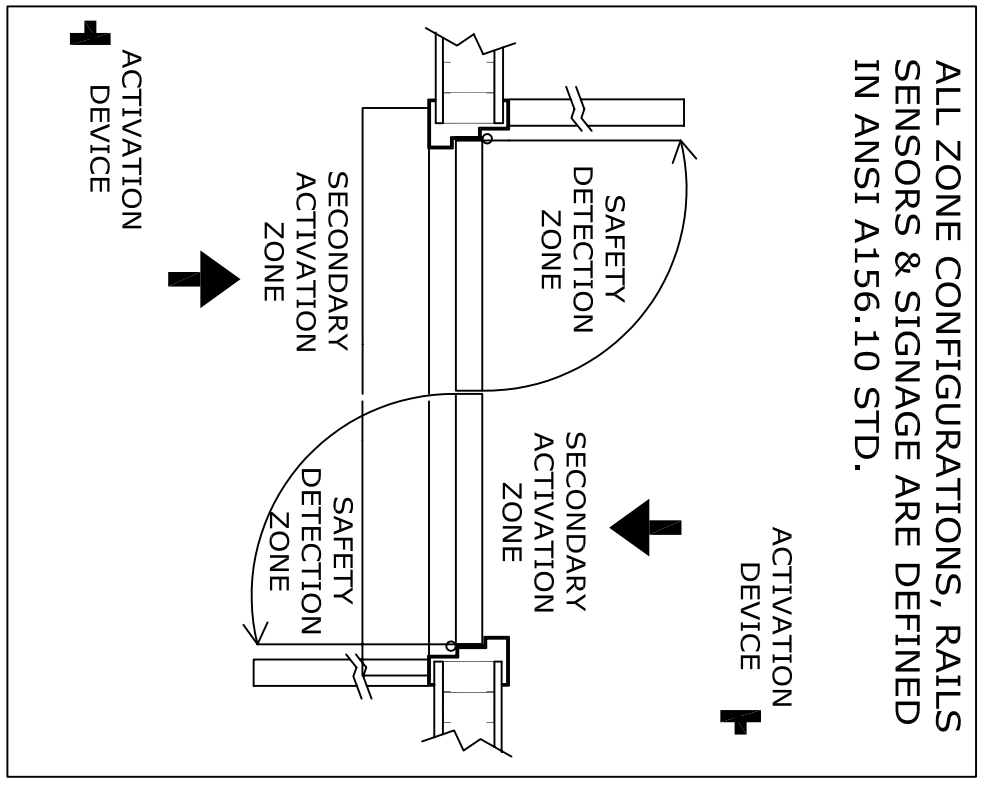

ALL ZONE CONFIGURATIONS, RAILS SENSORS & SIGNAGE ARE DEFINED IN ANSI A156.10 STD.


AUTOMATIC DOOR ACTIVATE SWITCH TO OPERATE



APPLICATION:
FA-8-DE-4 FULLY AUTOMATIC DUAL EGRESS LEFT HAND.

NOTE:
AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA-8" CETL USA APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.10 CERTIFIED TO CAN. CSA STD. C22.2#247 AS MANUFACTURED BY HUNTER ACCESS TECHNOLOGIES INC. COMPLETE DOOR SYSTEM MUST MEET ANSI A156.10 STANDARDS

STANDARD FINISH: CLEAR ANODIZE, DARK BRONZE, SPECIAL FINISHES ARE AVAILABLE

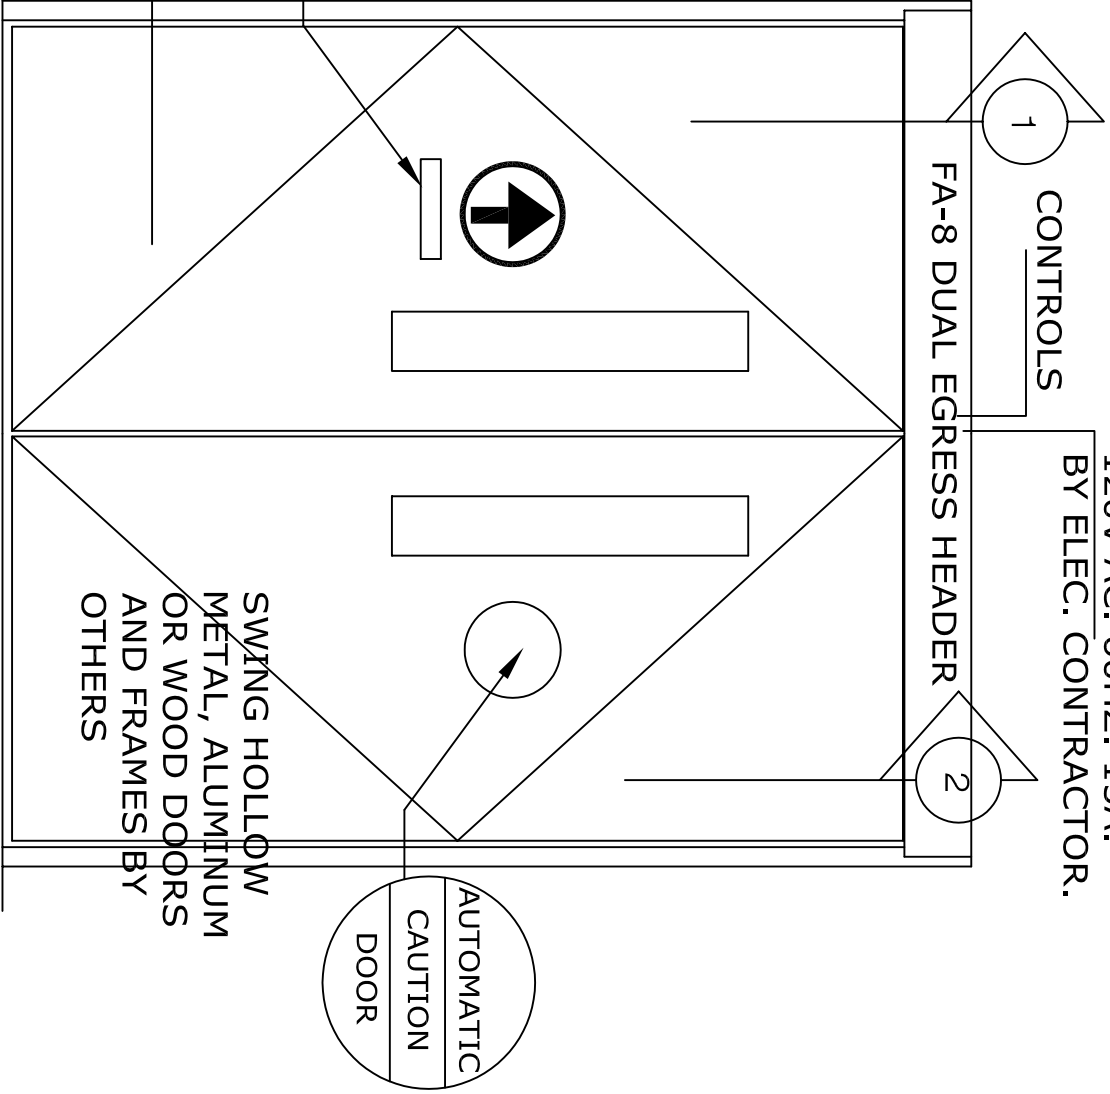

ELEVATION

Hunter
ACCESS TECHNOLOGIES INC.

125 KENYON DRIVE
SUITE #3
LAKEWOOD, NJ 08701
TEL: 732-942-6099
FAX: 732-942-6033
www.hunteraccess technologies.com

| | | | | | |
|--------------|-----------|-------|--|-----------|----|
| SHEET TITLE: | | | | SHEET NO. | 14 |
| ARCHITECT: | | | | SECTION | FA |
| CONTRACTOR: | | | | SCALE: | |
| | DRAWN BY: | DATE: | | | |